# **CHAR-MASTER**<sup>™</sup> Hamburger-Chicken-Wings-Steak Flame Broiler



## **MODEL #7650**

- 6 Burner
- Return-flow
- Single Meat Chain

Designed for high volume operators for cooking delicious flame broiled hamburgers, chicken, wings and steak sandwiches. Infrared burners cook quickly and thoroughly, offering a better tasting product and sealed-in juices. Cooks up to 510 frozen, 4 oz. patties per hour.

### **FEATURES**

- Return-flow Operation
- Single Meat Chain
- 600 Degree F Operating Temperature
- Automatic Temperature Control
- Integrated Bun Toaster
- Heavy gauge stainless steel welded frame construction
- 6 Infrared burners for thorough cooking
- High Capacity
- 99% smoke-free with optional catalyst
- Easy Cleaning and Maintenance
- Single Pilot Ignition
- Side Burner Access Panel

### **BENEFITS**

- Consistency
- Versatility
- Speed
- Quality
- Flexibility
- Food Safety
- Labor Savings
- Gas/Energy Efficient

## **APPROVALS**

- UL Listed
- NSF/ANSI 4

# **ADD-ON COMPONENTS**

### Extended Meat Chain

Labor Savings Extended Bun Chain Labor Savings Flat Table Maximize storage space underneath Tubular Stand Ease of cleaning Catalytic Converter Eliminated 99% of smoke Reduces gas cost by over 25% Helps "cool down" the kitchen Catalyst Hood Kit

Facilitates the installation of the Catalytic Converter in the field.

## **OPTIONAL PARTS**

- **220 Volt Female Receptacle** Necessary for use with a Bun
  - Platen unit

# 48" Gas Hose

Eliminates gas leaks

- 3/4" Brass Quick Disconnect Facilitates easy disconnect for cleaning
- Cable Restraining Device
- Safety- relieves strain on gas hose Emergency Spare Parts Kit Facilitates easy repairs, reducing down-time



DIMENSIONS	INCH	MM
Length	39-1/2	1003
Height	29-1/2	749
Width	37	940


ENERGY – GAS MODELS		
Gas connection 3/4" N.P.T.		
Electrical connection (specify exact voltage)		
Domestic	120V IØ 50/60Hz 18A	
Export	200-240V IØ 50/60Hz 18A	
Natural Gas	3" W.C.	
BTU/hr	58,000	
kW	22.6	
Liquid Propane	8" W.C.	
BTU/hr	61,000	
kW	23.8	

WEIGHT	LB	KG
Shipping	565	256

EXHAUST	CFM	СМН
Typical	800	1360



750 Beta Drive, Unit "G" Cleveland, Ohio 44143 800-272-8546 440-460-3990 Fax: 440-460-3999 Email: info@BPSproductsinc.com

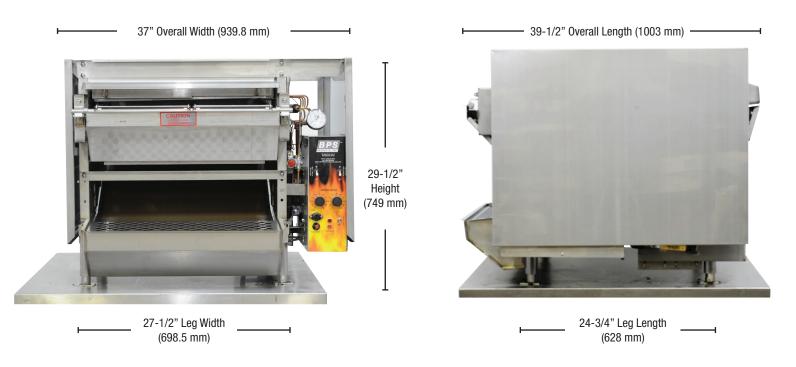

Metric dimensions rounded up to the neares whole millimieter. Specifications subject to change without notice.